


Eckelmann

MOTION AND PROPULSION

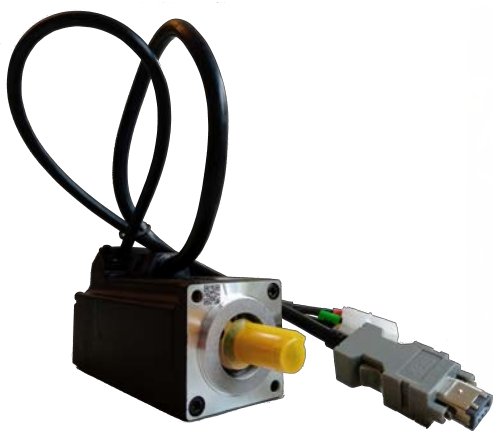

E°SCX low-voltage synchronous motors

Technical catalogue

IMPORTANT!

READ CAREFULLY BEFORE USE!

KEEP FOR FUTURE REFERENCE!

Document ID: E°SCX motors: Technical catalogue

Please indicate when placing reorder

Copyright 2023 Eckelmann FCS GmbH.

Version 1.3

English

All rights reserved. This document must not be copied and/or made available to third parties, in particular competitors, without our express consent.

Neither our contractual partners nor any other users are permitted to distribute or sell any of our software components without our prior express consent in writing.

Many of the product designations used in this guide are registered trademarks of their respective owners, even if this is not explicitly indicated. Eckelmann FCS does not accept liability for their free availability and use authorisation.

Descriptive information is given irrespectively of any possibly existing patent protection or other third-party property rights.

Subject to change without prior notice. Errors and omissions excepted.

Eckelmann FCS GmbH

Bodelschwinghstraße 20

32049 Herford | Germany

Phone +49 (0) 5221 966-0

Fax +49 (0) 5221 66347

www.eckelmann.de

info-fcs@eckelmann.de

Emergency maintenance and parts ordering:

Phone +49 (0) 5221 966-200

Fax +49 (0) 5221 966-173

E-mail Service-FCS@eckelmann.de

Eckelmann

CHANGE LOG

Version	Chapter	Date	Editor	Change
1.0	all	October 2021	A. Litschel	Document created
1.1	1, 2.1	November 2021	A. Litschel	Minor corrections (ch. 1 and "General technical data")
1.2	2.2, 2.3	January 2022	A. Litschel	New frame size added, minor corrections
1.3	2	January 2023	A. Litschel	Length measurements added for all motors

1 About this document	1
1.1 About the product	1
1.1.1 Manufacturer and designations	1
1.1.2 Performance specification	2
1.1.3 Designation code for E°Motors	3
1.1.4 Overview of the motor series	4
1.2 Contents of this document	5
1.3 Target audience	5
1.4 Disclaimer of liability	5
1.5 Additional documents of reference	6
1.6 Standards compliance and conformity	7
1.6.1 EU declaration of conformity	7
1.6.2 UL listing and compliance	8
2 Technical data: E°SCX motors	9
2.1 General technical data (E°SCX motors)	9
2.2 E°SCX-020...	10
2.2.1 Dimensions	10
2.2.2 Technical data	11
2.2.3 Torque characteristics	12
2.3 E°SCX-030...	13
2.3.1 Dimensions	13
2.3.2 Technical data	14
2.3.3 Torque characteristics	15

3 Connections	16
3.1 Power connections	16
3.2 Feedback connections	17
4 Decommissioning and disposal	18
4.1 Disassembly	18
4.2 Disposal	18

1 About this document


1.1 About the product

1.1.1 Manufacturer and designations

- Manufacturer: Eckelmann FCS GmbH
- Designation: E°SCX low-voltage synchronous motors

This catalogue applies to all E°SCX low-voltage synchronous motors built from 2023 onwards.

- Type plate: The type plate is always attached to the left side of the motor and contains the following data:

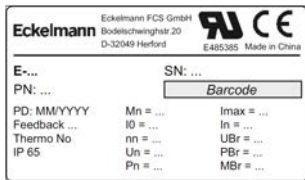

Position (marking)	Item/meaning
E-...	Type designation
PN: ...	Item number
SN: ...	Serial number
PD: MM/YYYY	Year/month of production
Feedback	(as entered)
Thermo	„no“/sensor as entered
(Protection class)	(as entered)
Mn = ...	Rated torque
IO = ...	Stall current
nn = ...	Rated speed
Un = ...	Rated voltage
Pn = ...	Rated power
Imax = ...	Max. current
In = ...	Rated current
UBr =	Voltage (brake)
PBr = ...	Power (brake)
MBr = ...	Holding torque (brake)

Tab. 1: Type plate

1.1.2 Performance specification

Together with the servo drives of the E°Darc product family, Eckelmann FCS's E°SCX low-voltage synchronous motors form very precise and highly dynamic servo drive units.

Electronic commutation

These motors are permanently excited motors with sinusoidal electronic commutation. Feedback systems used include single- or multiturn encoders.

Holding brake

All motors are also available with holding brake. This enables backlash-free clamping of the drive shaft at standstill. The holding force of the brake is designed according to the standstill torque of the motors.

Very high operational reliability

The brushless design and the use of grease-lubricated bearings (for the entire service life) ensure very high operational reliability.

1.1.3 Designation code for E°Motors

Motor (example):

E°SM - 063 - 06 - 60 - 37 - B N 0 1

Type:

E°SL	Synchronous compact motor (low-pole)	400 V
E°SX	Synchronous compact motor (multi-pole)	400 V
E°SM	Synchronous motor (low-pole)	400 V
E°SY	Synchronous motor (multi-pole)	400 V
E°SU3	Synchronous compact motor (UL listed)	230 V
E°SC3	Synchronous compact motor	230 V
E°SL3	Synchronous compact motor	230 V
E°SM3	Synchronous motor	230 V
E°SCL	Low-voltage synchronous motor (low-pole)	48 V
E°SCX	Low-voltage synchronous motor (multi-pole)	48 V

Flange size:

020 = flange 40 mm	056 = flange 92 mm
028 = flange 58 mm	063 = flange 115 mm
030 = flange 60 mm	065 = flange 130 mm
036 = flange 70 mm	071 = flange 142 mm
040 = flange 80 mm	100 = flange 190 mm
055 = flange 110 mm	

Stall torque:

(if < 3 Nm, classified as follows:

- D < 1 Nm
- E < 2 Nm
- F < 3 Nm)

Examples: "06" = 6.0 Nm; "E4" = 1.4 Nm.

Rated speed:

- 30 = 3000 rpm
- 40 = 4000 rpm
- 45 = 4500 rpm
- 50 = 5000 rpm
- 60 = 6000 rpm

Feedback:

01 = Resolver	37 = EQN1337-S
04 = SKS36	38 = EQI1331-S
05 = SKM36	39 = EQI1131-S
06 = SRS50	40 = MAR ST
07 = SRM50	41 = SROA35/46
19 = SEK37	
20 = SEL37	
21 = OIH35/AR38	
23 = S35	
24 = MAR MT	
29 = ECN1123-S ⁽¹⁾	

* safety encoder (SIL 2)

(1) non-standard

Holding brake:

- N = no holding brake
- B = with holding brake
- M = added moment of inertia

Shaft:

- N = smooth shaft
- K = keyway
- S = special shaft
- G = gear system

Connection/terminal box:

- 0 = no terminal box
- 1 = with terminal box
- 3 = - E°SC3/E°SU3/E°SCL/E°SCX motors: flange-mounted power supply
- all other motors with EnDat 2.2 encoders: Shield of encoder cable on pin 9
- 4 = separate cable outlet - circular connector
- 5 = HFO connector
- 6 = encoder connection: M23, 17-pole (option for motors with feedback codes 24, 40 or 41)

Cooling fan:

- 1 = with 24 V fan
- 2 = with 230 V fan

1.1.4 Overview of the motor series

	Motor series	Designated servo drive: E°Darc	Properties	Encoders/feedback
400 V motors	E°SL	Cxxi	8- to 10-pole synchronous compact motor (low mass inertia)	Resolvers, incremental and absolute encoders (Hiperface®), safety encoders (EnDat 2.2)
		K313		Incremental and absolute encoders
	E°SM	Cxxi	4- to 6-pole synchronous motor (high mass inertia)	Resolvers, incremental and absolute encoders (Hiperface®), safety encoders (EnDat 2.2)
	E°SX	Cxxi	10-pole synchronous compact motor (low mass inertia)	Resolvers, incremental and absolute encoders (Hiperface®), safety encoders (EnDat 2.2)
		K313		Incremental and absolute encoders
	E°SY	Cxxi	10-pole synchronous compact motor (high mass inertia)	Resolvers, incremental and absolute encoders (Hiperface®), safety encoders (EnDat 2.2)
230 V motors	E°SL3	Kxx	Synchronous compact motor for wide speed range (low mass inertia)	Incremental and absolute encoders
	E°SM3	Kxx	Synchronous motor (high mass inertia)	Incremental and absolute encoders
	E°SU3	Kxx	Synchronous compact motor for the low price segment	Incremental and absolute encoders
48 V motors	E°SCL	Sxx	Low-voltage synchronous motor (6-pole)	Absolute encoders
	E°SCX	Sxx	Low-voltage synchronous motor (10-pole)	Absolute encoders

1.2 Contents of this document

This technical catalogue contains information about Eckelmann FCS E°SCX low-voltage synchronous motors, including dimensional drawings, technical data and connection specifications. The catalogue is intended for all persons who carry out assembly, installation, commissioning, parameterization, maintenance and service work related to E°SCX low-voltage synchronous motors.

In order to avoid handling mistakes, this document must be kept available for operating and maintenance personnel at all times.

Keep it for future reference when operating the machine or machining line in which E°SCX low-voltage synchronous motors are integrated!

1.3 Target audience

The target audience for this technical catalogue consists of technicians and skilled workers who are familiar with the functional principles of automation systems in an industrial environment.

The information given in this catalogue requires the level of knowledge of trained personnel. Make sure that your relevant personnel have read and understood this document.

1.4 Disclaimer of liability

In order to handle and operate E°SCX low-voltage synchronous motors safely and without failure, it is necessary to adhere strictly to the information given in this catalogue and adequately train all personnel. The manufacturer accepts no liability for any damage resulting from disregard of this information or employment of untrained personnel.

1.5 Additional documents of reference

For available combinations of motors and drives, see [Eckelmann E°EDP: E°Darc S servo drives](#).

1.6 Standards compliance and conformity

1.6.1 EU declaration of conformity

Eckelmann

EU-Konformitätserklärung EU Declaration of Conformity

Hersteller: Manufacturer:	Eckelmann FCS GmbH
Anschrift: Address:	Bodelschwinghstr. 20, 32049 Herford
Produktbezeichnung: Product designation:	E°SC3-/E°SU3-/E°SCL-/E°SCX-Motoren E°SC3/E°SU3/E°SCL/E°SCX motors

Oben genannte Produkte entsprechen den wesentlichen Schutzanforderungen, die in der Richtlinie des Rates zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über die elektromagnetische Verträglichkeit 2014/30/EU, in der Niederspannungsrichtlinie 2014/35/EU und in der RoHS-Richtlinie 2011/65/EU festgelegt sind.
This is to confirm that the specified equipment conforms to the safety regulations determined by the Council for the Approximation of the Legislation amongst the Member Countries in the directives 2014/30/EU – EMC Directive, 2014/35/EU – LVD Directive and 2011/65/EU – RoHS Directive.

Die Übereinstimmung der bezeichneten Produkte mit den Vorschriften der Richtlinien wird begründet durch die Einhaltung folgender Normen:
The conformity of the specified equipment with the applicable regulations is established by compliance with the following standards:

Norm/Standard	Titel/Title
DIN EN 60034-1: 2010 IEC 60034-1: 2010	Drehende elektrische Maschinen – Teil 1: Bemessung und Betriebsverhalten Rotating electrical machines – Part 1: Rating and performance
DIN EN 61800-3: 2004/A1:2012 IEC 61800-3: 2004	Drehzahlveränderbare elektrische Antriebe – Teil 3: EMV-Anforderungen einschließlich spezieller Prüfverfahren Adjustable speed electrical power drive systems – Part 3: EMC requirements and specific test methods
DIN EN 60204-1: 2018 IEC 60204-1: 2016	Sicherheit von Maschinen – Elektrische Ausrüstungen von Maschinen – Teil 1: Allgemeine Anforderungen Safety of machinery – Electrical equipment of machines – Part 1: General requirements

Ort, Datum: Place, date:	Herford, 29.07.2022	
Rechtsverbindliche Unterschriften: Legally binding signatures:	 Frank van Beek (Geschäftsführer/Managing Director)	 Dr. Andreas Pottharst (Entwicklungsleiter/Director R&D)

1.6.2 UL listing and compliance

For E°SCX motors, UL listing and compliance are documented under the UL file number **E485385**.


2 Technical data: E°SCX motors

2.1 General technical data (E°SCX motors)

E°SCX motors	
IP code	IP65, shaft seal IP54
Holding brake	optional
Temperature sensor	see type plate
Position feedback	see E°Motoren: Geberinformationen
Ambient conditions	
Temperature (operation)	-20 °C ... +40 °C
Permissible humidity	max. 90 % (non-condensing)
Site of installation/operation	protection from gases and oils required
Permissible altitude of installation/operation	at rated power: up to 1000 m a. s. l.

2.2 E°SCX-020...

2.2.1 Dimensions

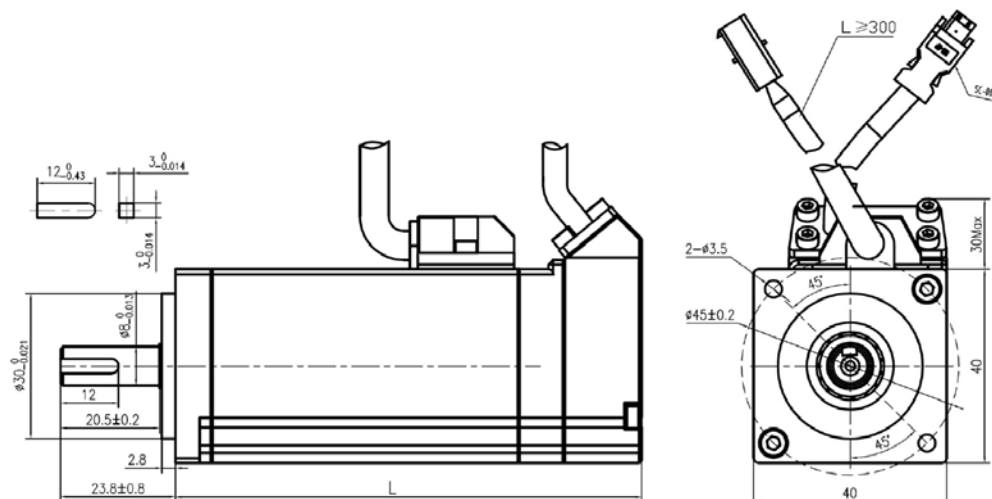

All dimensions indicated in mm

Motor type	Length (L)
E°SCX-020-D2-30-41-BK3	117
E°SCX-020-D2-30-41-NK3	87
E°SXC-020-D4-30-24-NK3	97
E°SCX-020-D4-30-41-BK3	138.5
E°SCX-020-D4-30-41-NK3	109


Tab. 2: Measure of length

2.2.2 Technical data


Motor type			E°SCX-020-D2-30-...	E°SCX-020-D4-30-...
Recommended servo drive: E°Darc			S05	S05
M_0	Stall torque	Nm	0.176	0.352
M_{max}	Peak torque	Nm	0.48	0.96
M_N	Rated torque	Nm	0.16	0.32
n_N	Rated speed	rpm	3000	3000
n_k	Cutoff speed (at operating temperature)	rpm	3000	3000
J	Rotor moment of inertia	kgcm ²	0.018	0.033
F_r	Max. radial force	N	120	120
F_a	Max. axial force	N	60	60
m	Weight (w/o brake)	kg	0.4	0.6
p	Number of pole pairs	/	5	5
k_T	Torque constant	Nm/A _{RMS}	0.11	0.11
k_E	Voltage constant	V/krpm	7	7
I_0	Stall current	A _{RMS}	1.65	3.52
I_N	Rated current	A _{RMS}	1.5	3.2
P_N	Rated power	W	50	100
RW	Phase resistance	Ohm	2.05	0.75
LW	Phase inductance	mH	2.25	0.95
U	Supply voltage	V AC	48	48
Brake				
M	Holding torque at 100 °C	Nm	0.32	0.32
J	Moment of inertia	kgcm ²	0.004	0.004
m	Weight	kg	0.2	0.2
U	Voltage DC +/- 10 %	V DC	24	24
P_{Br}	Brake power	W	5.9	5.9
Cable				
Q	Cross section (at cable length < 20 m)	mm ²	≥ 0.75	≥ 0.75

2.2.3 Torque characteristics

E°SCX-020-D2-30-...

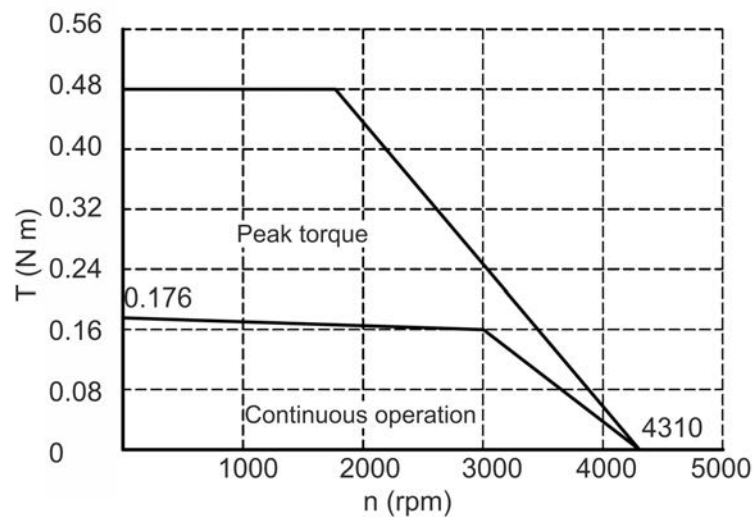


E°SCX-020-D4-30-...

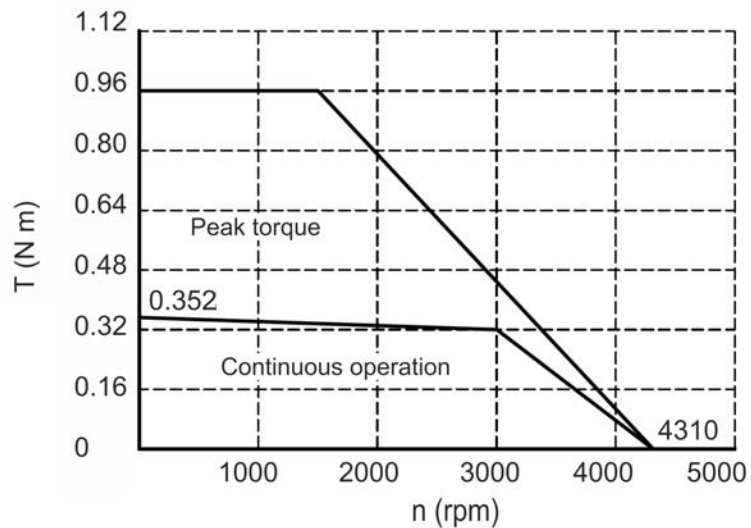

Eckelmann

2.3 E°SCX-030...

2.3.1 Dimensions

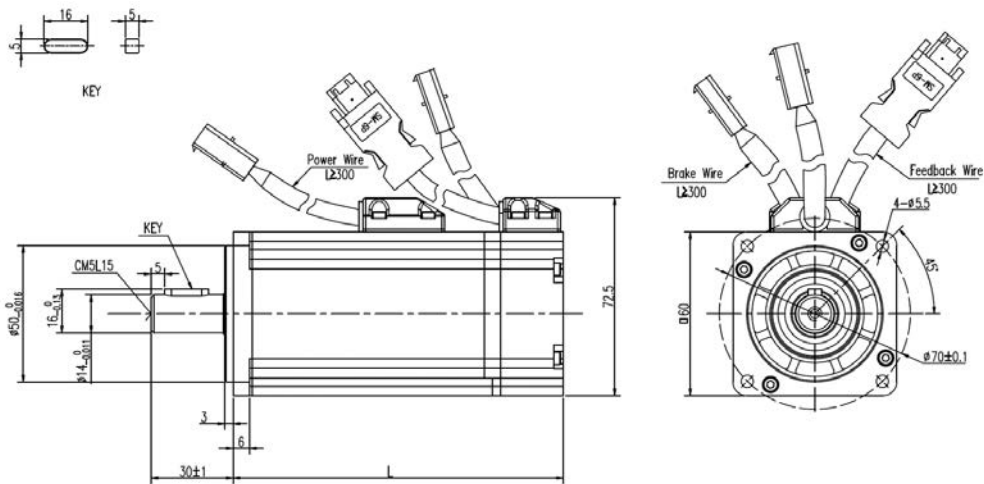

All dimensions indicated in mm

Motor type	Length (L)
E°SCX-030-D7-30-41-BK3	122
E°SCX-030-D7-30-41-NK3	87
E°SCX-030-E4-30-41-BK3	144
E°SCX-030-E4-30-41-NK3	109

Tab. 3: Measure of length


2.3.2 Technical data

Motor type			E°SCL-030-D7-30-...	E°SCL-030-E4-30-...
Recommended servo drive: E°Darc			S12	S12
M_0	Stall torque	Nm	0.7	1.4
M_{max}	Peak torque	Nm	1.92	3.81
M_N	Rated torque	Nm	0.64	1.27
n_N	Rated speed	rpm	3000	3000
n_k	Cutoff speed (at operating temperature)	rpm	3000	3000
J	Rotor moment of inertia	kgcm ²	0.204	0.38
F_r	Max. radial force	N	180	180
F_a	Max. axial force	N	90	90
m	Weight (w/o brake)	kg	0.9	1.2
p	Number of pole pairs	/	5	5
k_T	Torque constant	Nm/A _{RMS}	0.124	0.132
k_E	Voltage constant	V/krpm	7.5	8
I_0	Stall current	A _{RMS}	6.27	11.7
I_N	Rated current	A _{RMS}	5.7	10.6
P_N	Rated power	W	200	400
RW	Phase resistance	Ohm	0.31	0.135
LW	Phase inductance	mH	0.615	0.34
U	Supply voltage	V AC	48	48
Brake				
M	Holding torque at 100 °C	Nm	1.5	
m	Weight	kg	0.4	
U	Voltage DC +/- 10 %	V DC	24	
P_{Br}	Brake power	W	7.6	
Cable				
Q	Cross section (at cable length < 20 m)	mm ²	1	


Eckelmann

2.3.3 Torque characteristics

E°SCX-030-D7-30-...

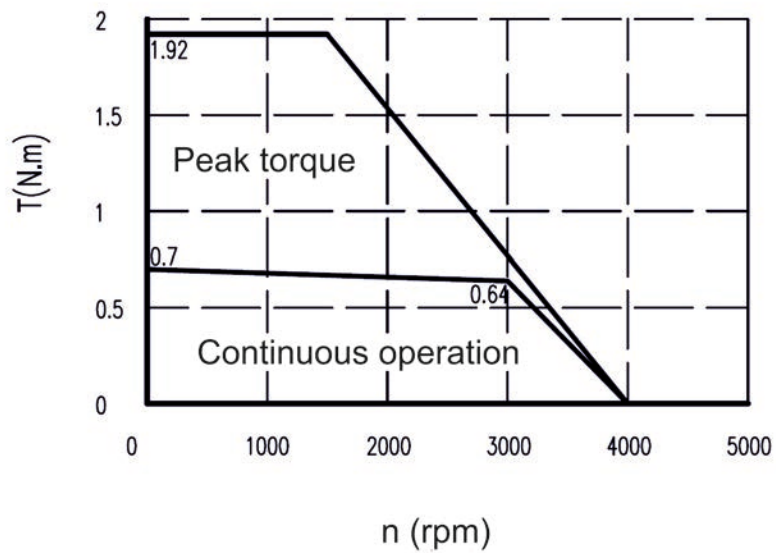


E°SCX-030-E4-30-...

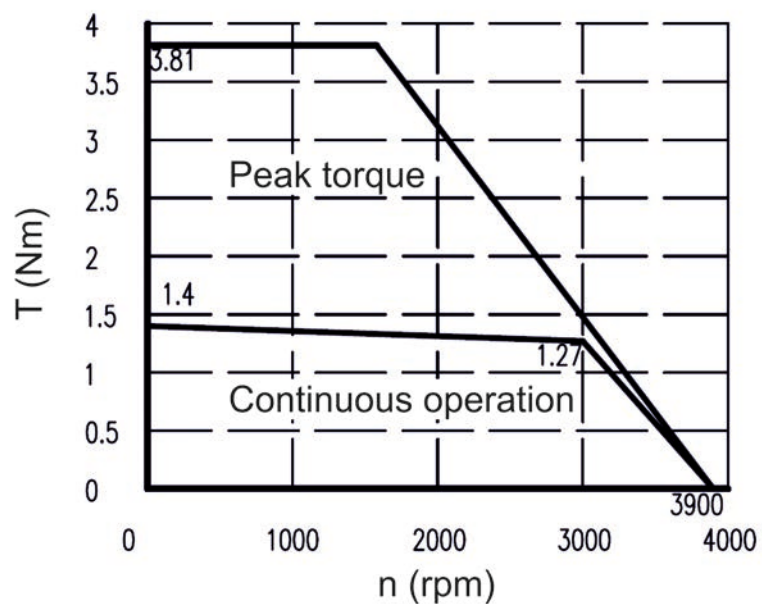

3 Connections

3.1 Power connections

E°SCX-020...-030...



Pin	Assignment
1	Phase U
2	Phase V
3	Phase W
4	PE


3.2 Feedback connections



NOTE

The feedback type of a particular motor is determined by the two-digit type code at the following position of the type designation: E°Sx-0xx-xx-xx-**XX**-...

Multiturn encoder



Pin	Assignment
1	DC + 5 V
2	GND_5V
3	VB
4	GND
5	SD
6	/SD

4 Decommissioning and disposal

4.1 Disassembly

Only trained and authorised personnel are permitted to disassemble the device. When disassembling the device, follow the same safety instructions as during maintenance.

4.2 Disposal

Eckelmann FCS exclusively delivers components for machine equipment. We do not carry out measures for recovery or municipal waste management.



NOTE

The client is obliged in accordance with contractual agreements to carry out the disposal of waste electrical and electronic equipment in compliance with legal requirements based on EC directive 2012/19/EU.

